




四列圆锥滚子轴承

Four-row tapered roller bearings

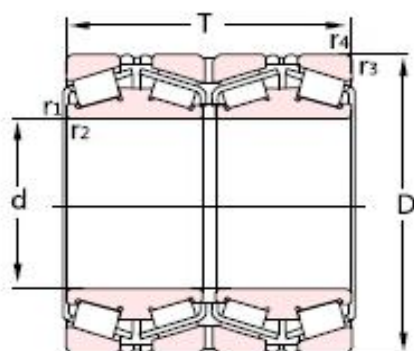

基本尺寸 mm					代号	基本额定负荷		质量
d	D	T	r _{1.2min}	r _{3.4min}		动态	静态	kg
						C	Co	
						KN	kN	
150	210	165	0.7	2.3	382930X2	660	1590	21.2
150	225	136	3	2.5	382030X2	595	1460	17.7
170	260	230	3	2.5	382034X2	1030	3100	43
180	280	180	3	2.5	380636	920	2540	39.6
200	282	206	3	2.5	380640X1	1280	3580	38.8
200	310	200	3	2.5	382040X2	2170	1520	55.5
205	320	205	4	3	380641	1160	2850	55.4
220	340	305	4	3	382044	2800	5950	99.5
240	360	310	4	3	382048X2	3630	2210	91
250	385	255	5	5	380650	2310	5350	108
260	360	265	3	2.5	382952/HC	1730	5050	77.8
260	380	280	4	7.5	380652X3	2400	6400	108
260	400	255	5	4	380652	2100	4900	117
260	400	345	5	4	382052	2850	7700	161
280	460	324	5	4	381156	3680	8350	219

300	420	300	4	3	382960/HC	2750	7500	130
300	460	390	5	4	382060/HC	3850	10200	222
300	500	350	5	4	380660/HCC9	2730	8900	280
300	500	370	5	4	381160/HC	390	8800	285
320	480	380	5	4	382064X2/HC	3300	11500	252
340	460	310	4	4	382968X2/HC	3000	8950	147
340	520	325	5	4	381068	3520	8200	247
340	580	425	5	4	381168	5150	12650	468
360	480	375	4	4	382972X2	2550	11800	196
360	600	420	4.7	4.7	381172	3950	13500	423
380	620	420	5	4	381176/HC	5050	12600	487
395	545	288.7	4	7.5	380679X2	2130	6500	195.5
400	540	400	5	5	380680/HC	6350	13300	261.5
400	600	356	5	4	381080/HC	4950	12400	345
420	700	480	6	5	381184	10500	11900	760
440	650	454	6	5	380688	6650	18800	432
440	650	376	6	5	381088/HC	4900	13800	420
460	620	310	5	4	381992/HC	3650	10000	260
460	650	474	6	6	380692	4500	20000	506
480	678	494	6	6	380696	9130	23800	571
480	700	420	5	5	381096	4730	16900	582
500	720	400	5	5	3810/500X2	7500	18600	565
530	780	450	6	5	3810/530	7200	18200	744
530	870	590	7.5	6	3811/530	7170	14500	1422
560	750	368	5	4	3819/560/HC	7850	15800	456
560	920	620	7.5	6	3811/560	20000	32000	1690
600	800	380	5	4	3819/600/HC	4400	18100	497
600	870	480	6	6	3810/600/HC	8900	27500	995
600	980	650	7.5	7.5	3811/600/HC	9650	37500	1970
630	850	418	6	6	3819/630	6700	22200	683
630	920	515	7.5	7.5	3810/630/HC	6550	27500	1190
630	1030	670	7.5	6	3811/630/HC	16500	42000	2200
670	900	412	6	6	3819/670/HC	5250	24600	773
676	910	620	4	8	3806/676	11000	37500	1162
710	900	410	3	6	3806/710	5880	27500	650
730	1035	755	3.3	6.4	3806/730	20500	58500	2120
750	950	410	6	6	3806/750	9650	27780	703
750	1220	840	9.5	9.5	3811/750	17700	68500	3994

